

PULSATION DAMPENERS


EQUAFLUX 302

MADE IN ITALY






- **Product of Italian origin**
- Works with **non**-lubricated air
- Idles without damage
- High output and sturdiness
- Suitable for minimising flow pulsations
- Suitable for minimising vibration during pumping
- Atex Zone 1 (*on request*) - Atex zone 2 standard



 **STANDARD:** II 3/3 GD c IIB T135°C (zone 2)
CONDUCT: II 2/2 GD c IIB T135°C (zone 1)

Ex STANDARD: II 3/3 GD c IIB T135°C (zone 2)
 CONDUCT: II 2/2 GD c IIB T135°C (zone 1)

AVAILABLE MATERIALS

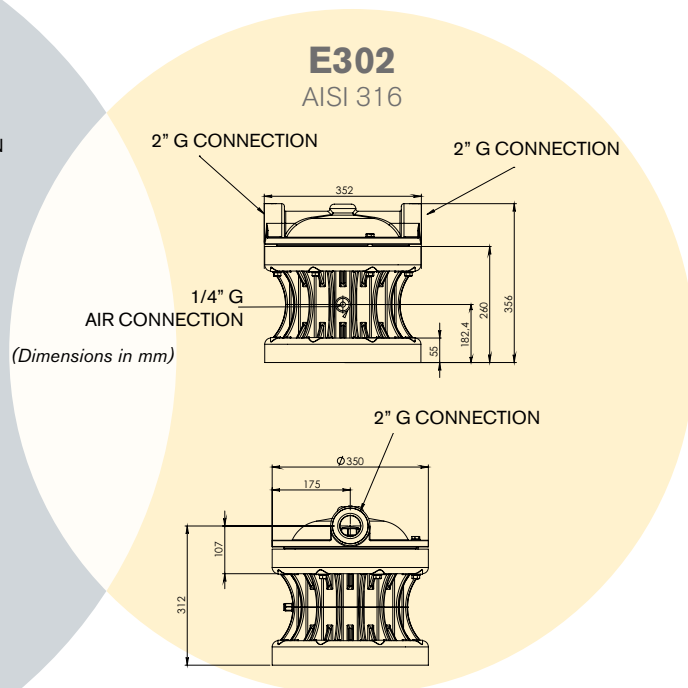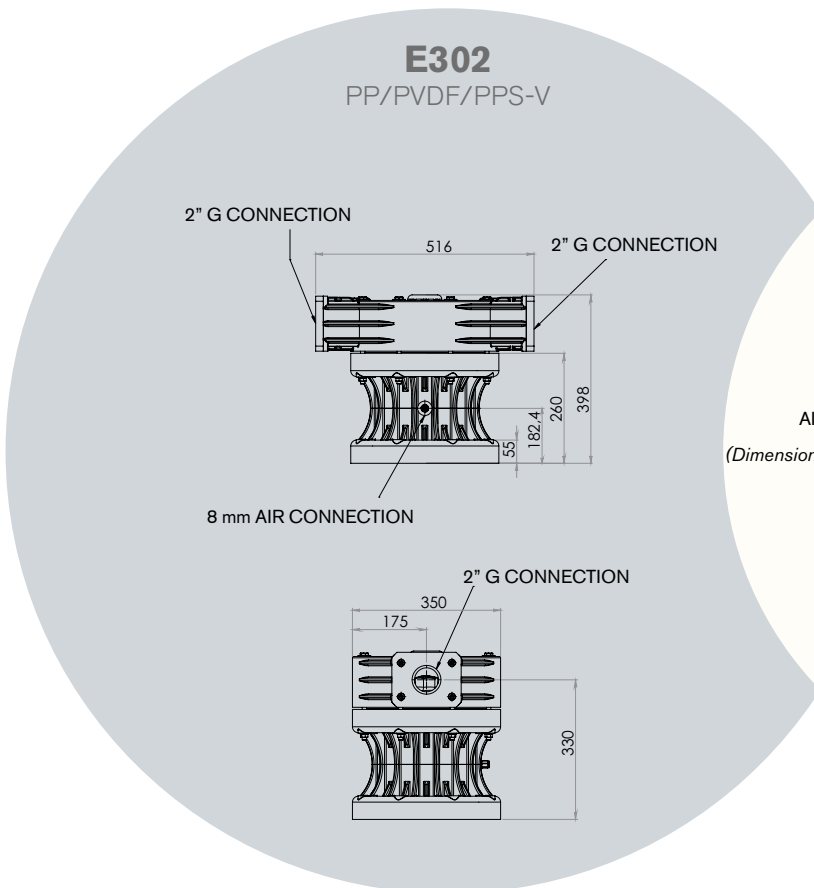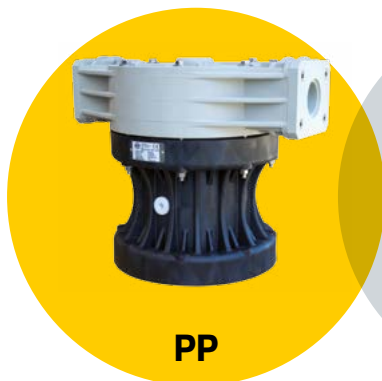

PRODUCT CONNECTION	AIR CONNECTION	MAX. AIR SUPPLY PRESSURE	APPLICABILITY	MATERIAL	WEIGHT	OPERATING TEMPERATURE	DIMENSION (mm)
G 2"	Ø 8 mm	7 bar	BOXER 522 PP	PP	23 Kg	min +3°C max. +65°C	398x516
G 2"	Ø 8 mm	7 bar	BOXER 522 PVDF	PVDF	28,5 Kg	min +3°C max. +95°C	398x516
G 2"	Ø 8 mm	7 bar	BOXER 502 ALU	Alu	26 Kg	min +3°C max. +95°C	356x352
G 2"	Ø 8 mm	7 bar	BOXER 502 AISI 316	AISI 316	32 Kg	min +3°C max. +95°C	356x352