


Specifications and types




Suction fittings	G 3" f or DN 80 - NPT on request
Delivery fittings	G 2" 1/2 m or DN 65 - NPT on request
Max flow rate	65 m3/h
Max head	29 m
Viscosity up to	150 cps

PP

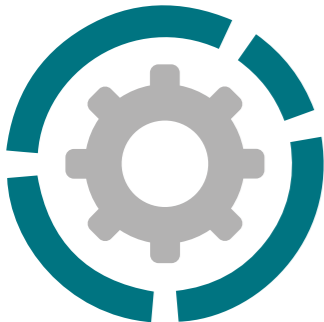

PVDF

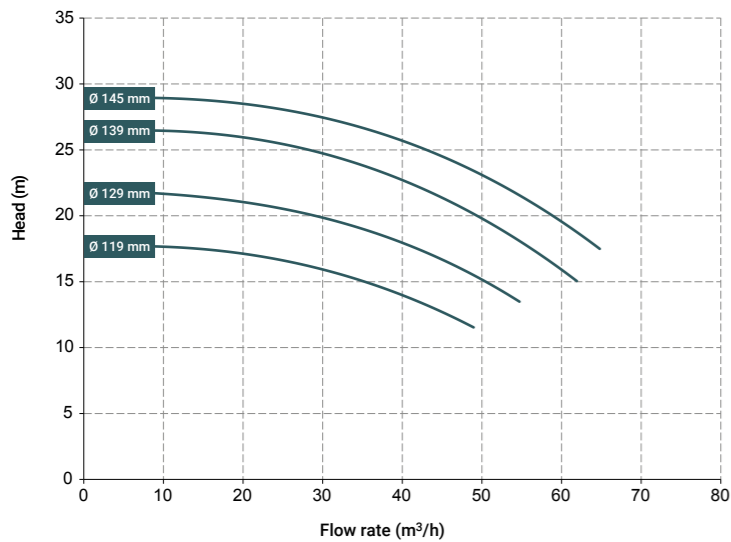

The curves and the performances refer to pumps with immersed suction and open delivery outlet, with water at 20°C and vary based on the composition materials and 50 Hz two-pole motor (2900 rpm).



Operating temperature and weights:	
PP	from + 3°C to + 65°C, 4.5 Kg
PVDF	from + 3°C to + 95°C, 5.2 Kg

MAIN APPLICATION SECTORS



CHEMICAL
INDUSTRY



WATER AND SLUDGE
TREATMENT



GALVANIC AND ELECTRONIC
INDUSTRY

IMPELLER

- Ø 145 mm (Standard)
- Ø 139 mm
- Ø 129 mm
- Ø 119 mm



Standard electric motor:

Kw 4 HP 5.5

Casing B3+B5 RPM 2900

Three-phase 230/400 V - 50/60 HZ

ATEX available on request

Kw 5.5 HP 7.5

Casing B3+B5 RPM 2900

Three-phase 400/690 V - 50/60 HZ

ATEX available on request

Kw 7.5 HP 10

Casing B3+B5 RPM 2900

Three-phase 400/690 V - 50/60 HZ

ATEX available on request